

Delta Octopus


Communication server

Communication server Delta Octopus созданный на базе Intel® Xeon® Scalable Emerald Rapids и Intel® Xeon® Scalable Sapphire Rapids.

Delta Octopus provides high-speed processing of large volumes of traffic by leveraging the most advanced technological advantages of the platform:

- ▲ Up to 64 ядер Intel® Xeon® Scalable Emerald Rapids
- ▲ DDR 5 RAM with frequency up to 5600 MHz
- ▲ 5 slots OCP 3.0 PCIe Gen 5 x 16

Delta Octopus Communications Server allows software developers to implement Load Balancers, VPN Concentrators, BRAS/BNG and various cryptanalytic applications.

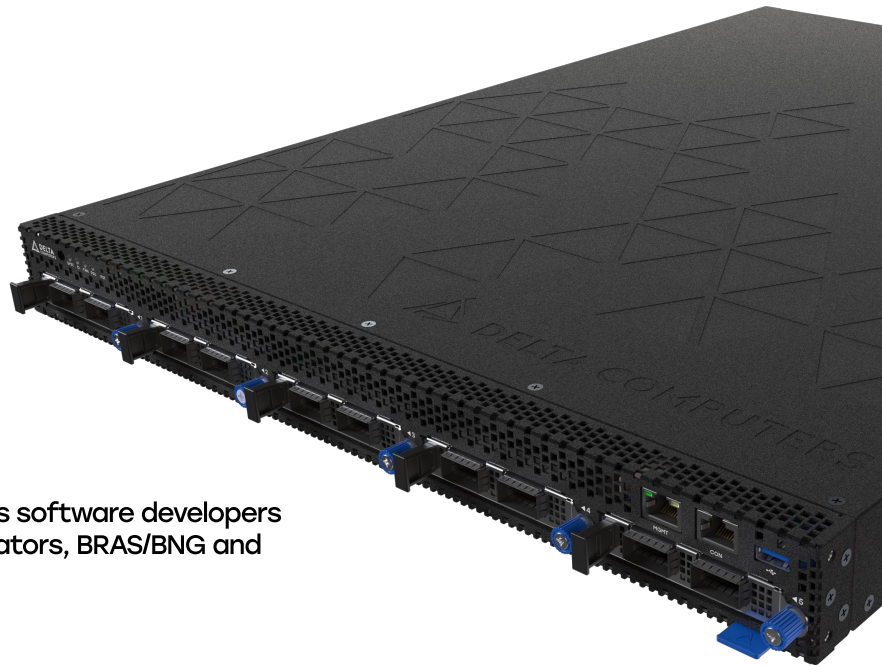

Processor	5 Intel® Xeon® Scalable (Emerald Rapids) or 4 Intel® Xeon® Scalable (Sapphire Rapids)	Firmware	Delta BIOS Delta BMC
Memory	16 x DIMM DDR5 до 5600 MHz (for processors Emerald Rapids) 16 x DIMM DDR5 до 4800 MHz (for processors Sapphire Rapids)	Power supply	2 x CRPS power supplies or from a centralized busbar OCP 12V or from the 48V telecom power bus standard (Telco Rack)
Expansion slots	5 x PCIe Gen 5 OCP 3.0	Dimensions, L x W x H	630 mm x 439 mm x 43 mm
Built-in interfaces	1 x 1 Gbe RJ-45 1 x USB 3.0 1 x Console port	Weight	14 kg
Data storage	2 x NVMe SSD M.2		
Trusted boot module	Yes		